

PNEUMATIC STRAPPING TOOL - CP98

POLYESTER / PLASTIC STRAP
FRICTION WELD
PUSH BUTTON TENSION, SEAL
AND CUT OFF




CP 98

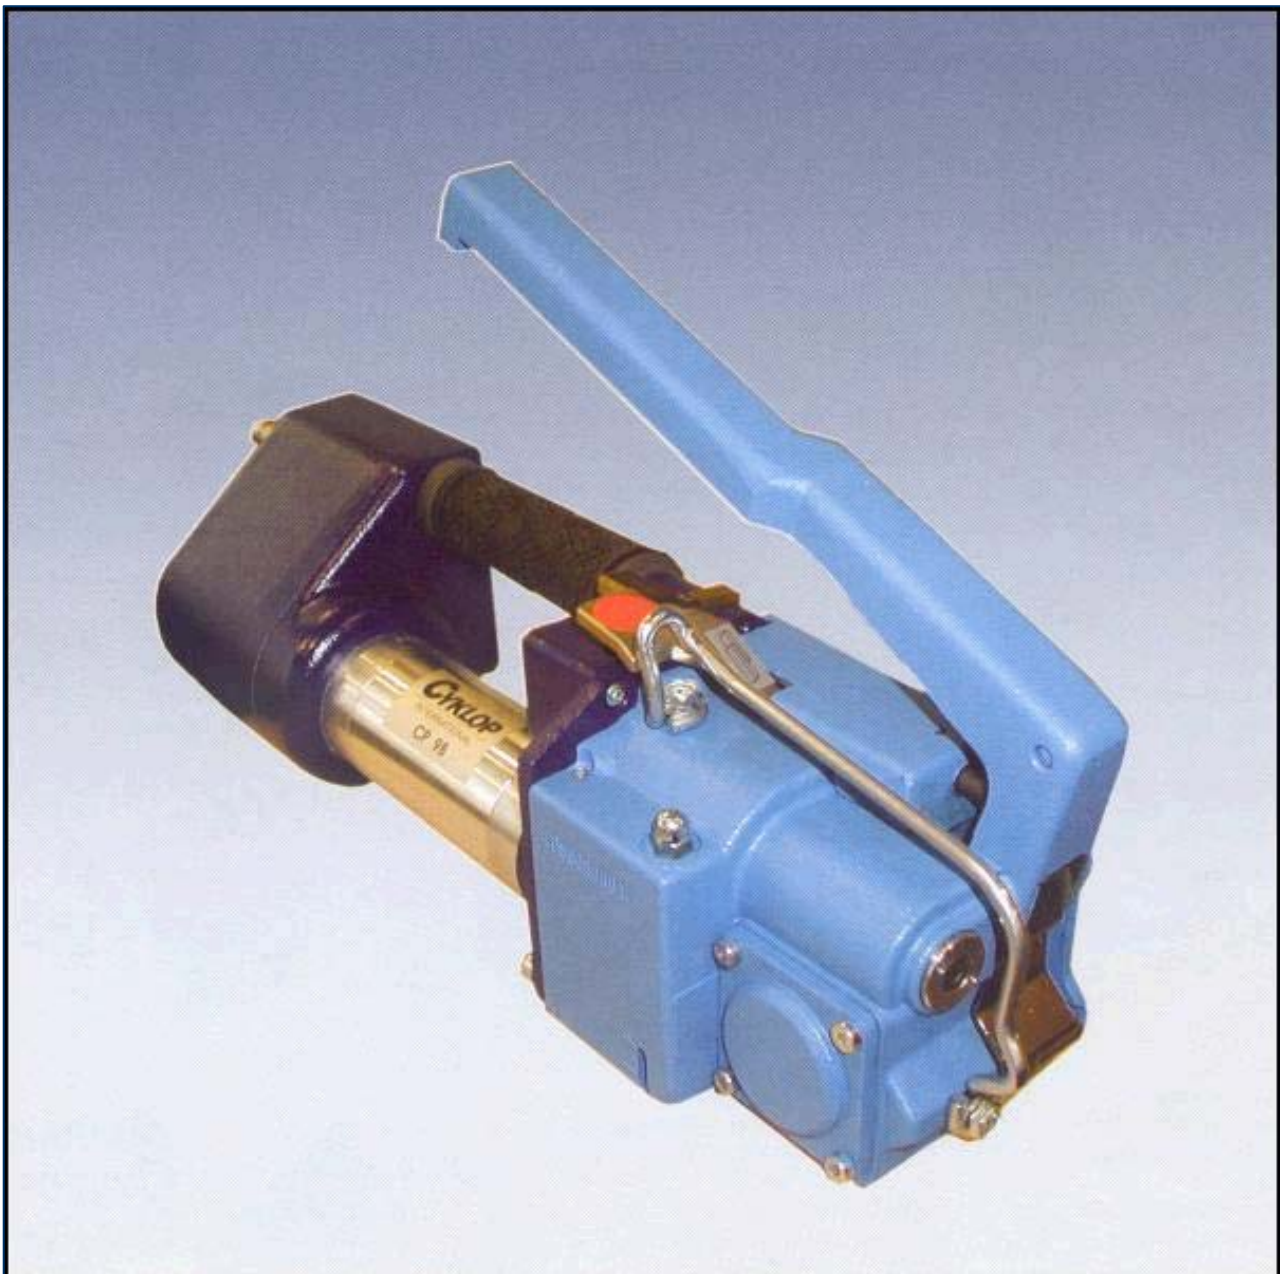


Pneumatic friction weld tool for polyester or plastic strap.
High tension capacity (410kg) – The CP98 can achieve higher tension Than any other hand tool in the market. Considering the low weight - (5.8 kg), it can be easily used without a suspension unit.
At the end of the tensioning cycle, the CP98 allows the strap to be tensioned again and again prior to sealing, resulting in improved holding power and tension distribution.

OPERATION

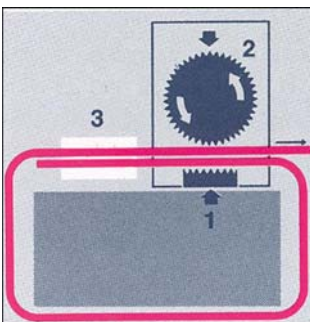

After strap is placed around package, squeeze handles together to open strapping area. Insert the bottom and top straps below and above the front separator respectively as well as between the feedwheel and gripper at the same time (see 1 & 3)
The tension button is then pressed. After initial tensioning wait for two or three seconds and jog again for optimum tension and press sealing button. Release the strap by pushing the handle all the way forward and back against the hand grip.

FRICTION WELD



The CP98 seals the strap with a friction weld. This is achieved by pads that create heat by vibration which welds the straps together. This is a much more efficient seal than the metal seal.

DATA

Weight	5.8kg
Tension force	410 kg
Strap width	12,15,19mm
thickness	0.60 – 1.12mm
Tensioning speed	150mm / sec

CYKLOP SECURA PTY. LTD.

A.B.N. 61 002 908 349

WEB: www.secura.com.au

EMAIL: sales@secura.com.au

HEAD OFFICE

210 RAILWAY TERRACE
GUILDFORD, N.S.W. 2161
PH: (02) 96370888
FAX: (02) 9897 1222

POSTAL ADDRESS

P.O. BOX 837
GUILDFORD, N.S.W. 2161

VICTORIAN BRANCH

1/10 FITZGERALD RD
LAVERTON NORTH, VIC 3026
PH: (03) 9369 0711, 9369 0733
FAX: (03) 9369 0766
