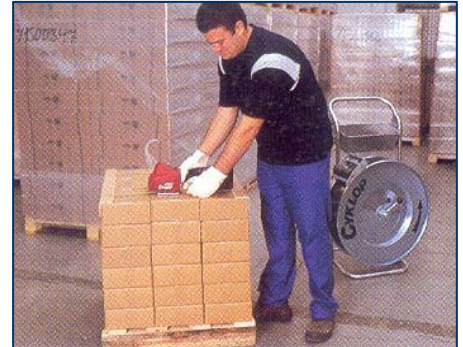

POLYESTER - MANUAL STRAPPING SYSTEMS



A PRODUCT DESIGNED BY CYKLOP TO SECURE MEDIUM / HEAVY LOADS

IT HAS STRENGTH COMPARABLE TO STEEL STRAP. IN ADDITION, IT HAS ELONGATION CHARACTERISTICS THAT STEEL STRAP CANNOT OFFER

POLYESTER HAS AN ELASTIC RECOVERY CAPACITY WHICH ALLOWS IT TO ABSORB SHOCK AND RECOVER, CREATING GREATER RETAINED TENSION

NO SHARP EDGES WON'T CUT HANDS AND IMPROVES OVERALL SAFETY

UNAFFECTED BY WEATHER IT IS RESISTANT TO ULTRAVIOLET RAYS AND DOES NOT RUST




Polyester strap 450N

| Type | Width (mm) | Thickness (mm) | Coil length (mtrs) | Breaking strength(kg) | Elongation |
|------|------------|----------------|--------------------|-----------------------|------------|
| 2220 | 9.2 | 0.60 | 3000 | 200 | 11% |
| 2230 | 12.0 | 0.62 | 2350 | 300 | 11% |
| 2242 | 15.5 | 0.68 | 1750 | 420 | 11% |
| 2254 | 15.5 | 0.89 | 1300 | 540 | 11% |

Polyester strap 550N

| Type | Width (mm) | Thickness (mm) | Coil length (mm) | Breaking strength(kg) | Elongation |
|------|------------|----------------|------------------|-----------------------|------------|
| 1238 | 12.5 | 0.58 | 2500 | 350 | 11% |
| 1258 | 15.5 | 0.68 | 1750 | 520 | 11% |
| 1268 | 15.5 | 0.89 | 1300 | 680 | 11% |
| 1287 | 15.5 | 1.12 | 1100 | 860 | 11% |

Friction Weld



Strap ends are vibrated together under high pressure to develop heat which fuses the strap together

Friction weld tools



CP98 Pneumatic
High tension – 410kg
Push button functions



CE92 Electric
Tension –200kg
Push button functions



CB 130 Battery
Tension – 130kg
Push button functions
One hand operation



CHT – 300 Battery
Tension – 330kg
Touch panel adjustments
One hand operation

Metal Seal



CM61 Combination
Magazine seal dispenser
One tool operation
Tensions, seals and cuts strap



ORS 1100 Tensioner
Capstan hand tension
with cutter



CCH Combination
One lever operation.
Tensions, seals and
cuts strap



MIP 395 Tensioner
Capstan high tension
with cutter

CYKLOP SECURA PTY. LTD.

A.B.N. 61 002 908 349

WEB: www.secura.com.au

EMAIL: sales@secura.com.au

HEAD OFFICE

210 RAILWAY TERRACE
GUILDFORD, N.S.W. 2161
PH: (02) 96370888
FAX: (02) 9897 1222

POSTAL ADDRESS

P.O. BOX 837
GUILDFORD, N.S.W. 2161

VICTORIAN BRANCH

1/10 FITZGERALD RD
LAVERTON NORTH, VIC 3026
PH: (03) 9369 0711, 9369 0733
FAX: (03) 9369 0766